
JASSOTHERAS

Integrity® Collection Specifications B3672 MicroSilk®

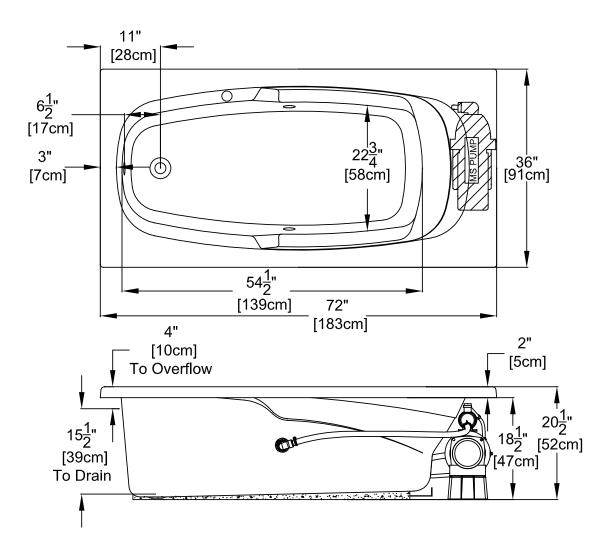

Patents received or pending.

Drop-in-Hole Size:

Operating Capacity:


Overflow Capacity:

Carton Weight:

Cube:

Floor Loading / sq.ft.:

Note: Dimensional Tolerances: ±1/4"



34" x 70"

45 Gal.

69 Gal.

44.7 lbs.

119 lbs.

37.3 ft.³

Includes a quiet, 120V MicroSilk[®] System, an air switch, On/Off Control and 1 MicroSilk[®] Delivery Port. Requires (1) 20A, 120v GFCI protected circuit.

Construction: Reinforced Acrylic shell mounted on Level Form[™] pre-leveled full support base.

We provide products listed with Intertek ETL SEMKO (Edison Testing Laboratories) U.S. and Canadian and with International Association of Plumbing and Mechanical Officials (IAPMO). Consult factory with your listing requirements.