

отн FRA D R 8328 MacArthur Dr. • North Little Rock, AR 72118 501.771.4477 • Fax: 501.771.2333 Customer Service: 800.255.5766 www.jasoninternational.com

Designer Collection Specifications BY630 AirMasseur®

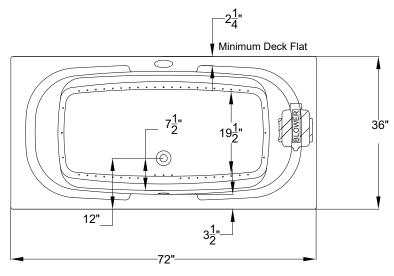

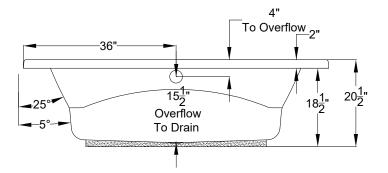

Standard

Premier


Signature

Patents recieved or pending.

Drop-in-Hole Size:	70" x 34"
Operating Capacity:	45 Gal.
Overflow Capacity:	62 Gal.
Floor Loading / sq.ft.:	44.4 lbs.
Carton Weight:	115 lbs.
Cube:	41.5 ft. ³

Construction: Fiberglass reinforced acrylic bath with Level Form[™] full-support base.

We provide products listed with Intertek ETL SEMKO (Edison Testing Laboratories) U.S. and Canadian and with International Association of Plumbing and Mechanical Officials (IAPMO). Consult factory with your listing requirements.

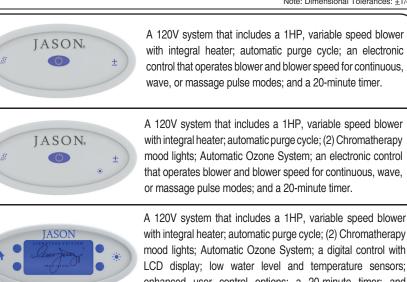

A 120V system that includes a 1HP, variable speed blower with integral heater; automatic purge cycle; (2) Chromatherapy mood lights; Automatic Ozone System; an electronic control that operates blower and blower speed for continuous, wave, or massage pulse modes; and a 20-minute timer.

Note: Dimensional Tolerances: +1/4"

A 120V system that includes a 1HP, variable speed blower with integral heater; automatic purge cycle; (2) Chromatherapy mood lights; Automatic Ozone System; a digital control with LCD display; low water level and temperature sensors; enhanced user control options; a 20-minute timer; and Bluetooth Sound Immersion System.

Control keypad operates blower and blower speed for continuous, wave, or pulse massage modes, LED Chromatherapy lights, and shows equipment status, water tempurature, and time remaining.