


JASSON DE CONTRACTOR DE CONTRA

## Designer Collection Specifications EL635 MicroSilk<sup>®</sup>- Whirlpool



Note: Equipment may extend beyond the outside perimeter of the bath. Consult factory for details.

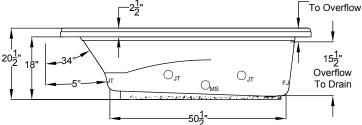



DROP-IN HOLE SIZE

Patents recieved or pending.

Drop-in-Hole Size:	See I
Operating Capacity:	52 G
Overflow Capacity:	80 G
Floor Loading / sq.ft.:	48.4
Carton Weight:	156 l
Cube:	43.2

e Diagram Gal. Gal. 4 Ibs. 6 Ibs. 2 ft.<sup>3</sup>


Standard

Premier

A 120V system that includes a MicroSilk<sup>®</sup> unit; a quiet 1-1/2 HP, 1-speed whirlpool pump; an electronic control; and a 20-minute timer. The keypad also controls the optional Jetted Neck Pillow.

Note: Dimensional Tolerances: +1/4"

A 120V system that includes a MicroSilk<sup>®</sup> unit; a quiet 1-1/2 HP, 1-speed whirlpool pump; bath heater; (2) Chromatherapy mood mights; Automatic Ozone System; an electronic control; and a 20-minute timer. The keypad also operates the optional Jetted Neck Pillow.



IASON. P

JASON.

10

6

4"

A 120V system that includes a MicroSilk<sup>®</sup> unit; a quiet 1-1/2 HP, 1-speed whirlpool pump; bath heater, (2) Chromatherapy mood mights; Automatic Ozone System; a digital control with LCD display; low water level and temperature sensors; enhanced user control options;

**Construction:** Fiberglass reinforced acrylic bath with Level Form<sup>™</sup> full-support base.

We provide products listed with Intertek ETL SEMKO (Edison Testing Laboratories) U.S. and Canadian and with International Association of Plumbing and Mechanical Officials (IAPMO). Consult factory with your listing requirements.

MicroSilk® and Whirlpool pumps, LED Chromatherapy mood lights, optional Jetted Neck Pillow, and shows equipment status, water temperature, and time remaining.

a 20-minute timer; and Bluetooth Sound Immersion System. Control keypad operates the