


JASSON DE CONTRACTOR DE CONTRA

Integrity® Collection Specifications V4272 AirMasseur®

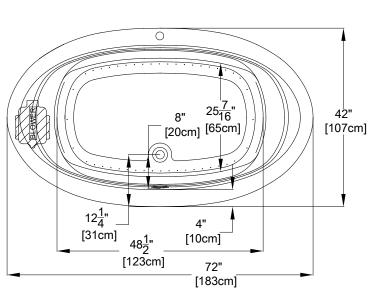

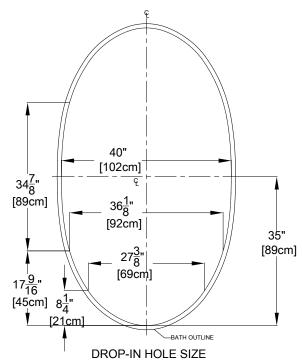

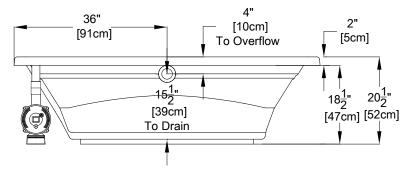

Patents received or pending.

Drop-in-Hole Size: Operating Capacity: Overflow Capacity: Floor Loading / sq.ft.: Carton Weight: Cube: See Diagram 46 Gal. 74 Gal. 42.8 lbs. 120 lbs. 43.2 ft.³ Air Switch Control Note: Dimensional Tolerances: ±1/4"

Includes a quiet, 120v, 3/4 HP, variable speed air blower with an integral air heater, 20-minute timer and automatic purge cycle. Air switch operates the on/off and speed functions of the blower. Requires (1) 15A, 120v GFCI protected circuit.

Construction: Reinforced Acrylic shell mounted on Level Form[™] pre-leveled full support base.

We provide products listed with Intertek ETL SEMKO (Edison Testing Laboratories) U.S. and Canadian and with International Association of Plumbing and Mechanical Officials (IAPMO). Consult factory with your listing requirements.