## WATERMYRK

BROOKLYN, NEW YORK

## Victorian SH-FRS30


5 Function Antiscale Hand Shower




- Flow Rate: 1.75 GPM at 80 psi
- Includes a Backflow Preventor
- Spray Patterns: Massage, Mist, Rain, Rain/ Mist, and Rain/Massage
- Professional Installation Required.
- Only available in the following finishes: PC, GM, PN, SN, AB, EB, EL, ORB, PT, SEL, VB, CL, PG, SG

Available in all finishes shown on the Watermark Designs website



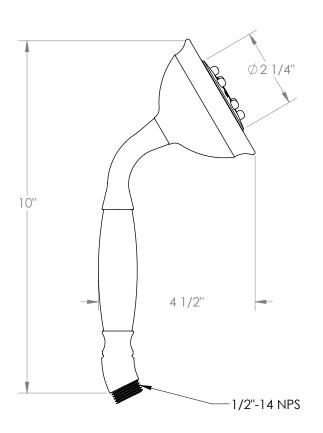

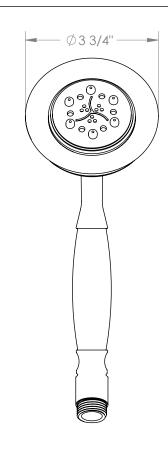

Meets the applicable requirements of ASME A112.18.1-2005/CSA B125.1-05, entitled "Plumbing Supply Fittings". Watermark Designs reserves the right to make revisions without notice to produce specifications. All product dimensions are nominal.